


Kelly[®] Commercial Truck Tires

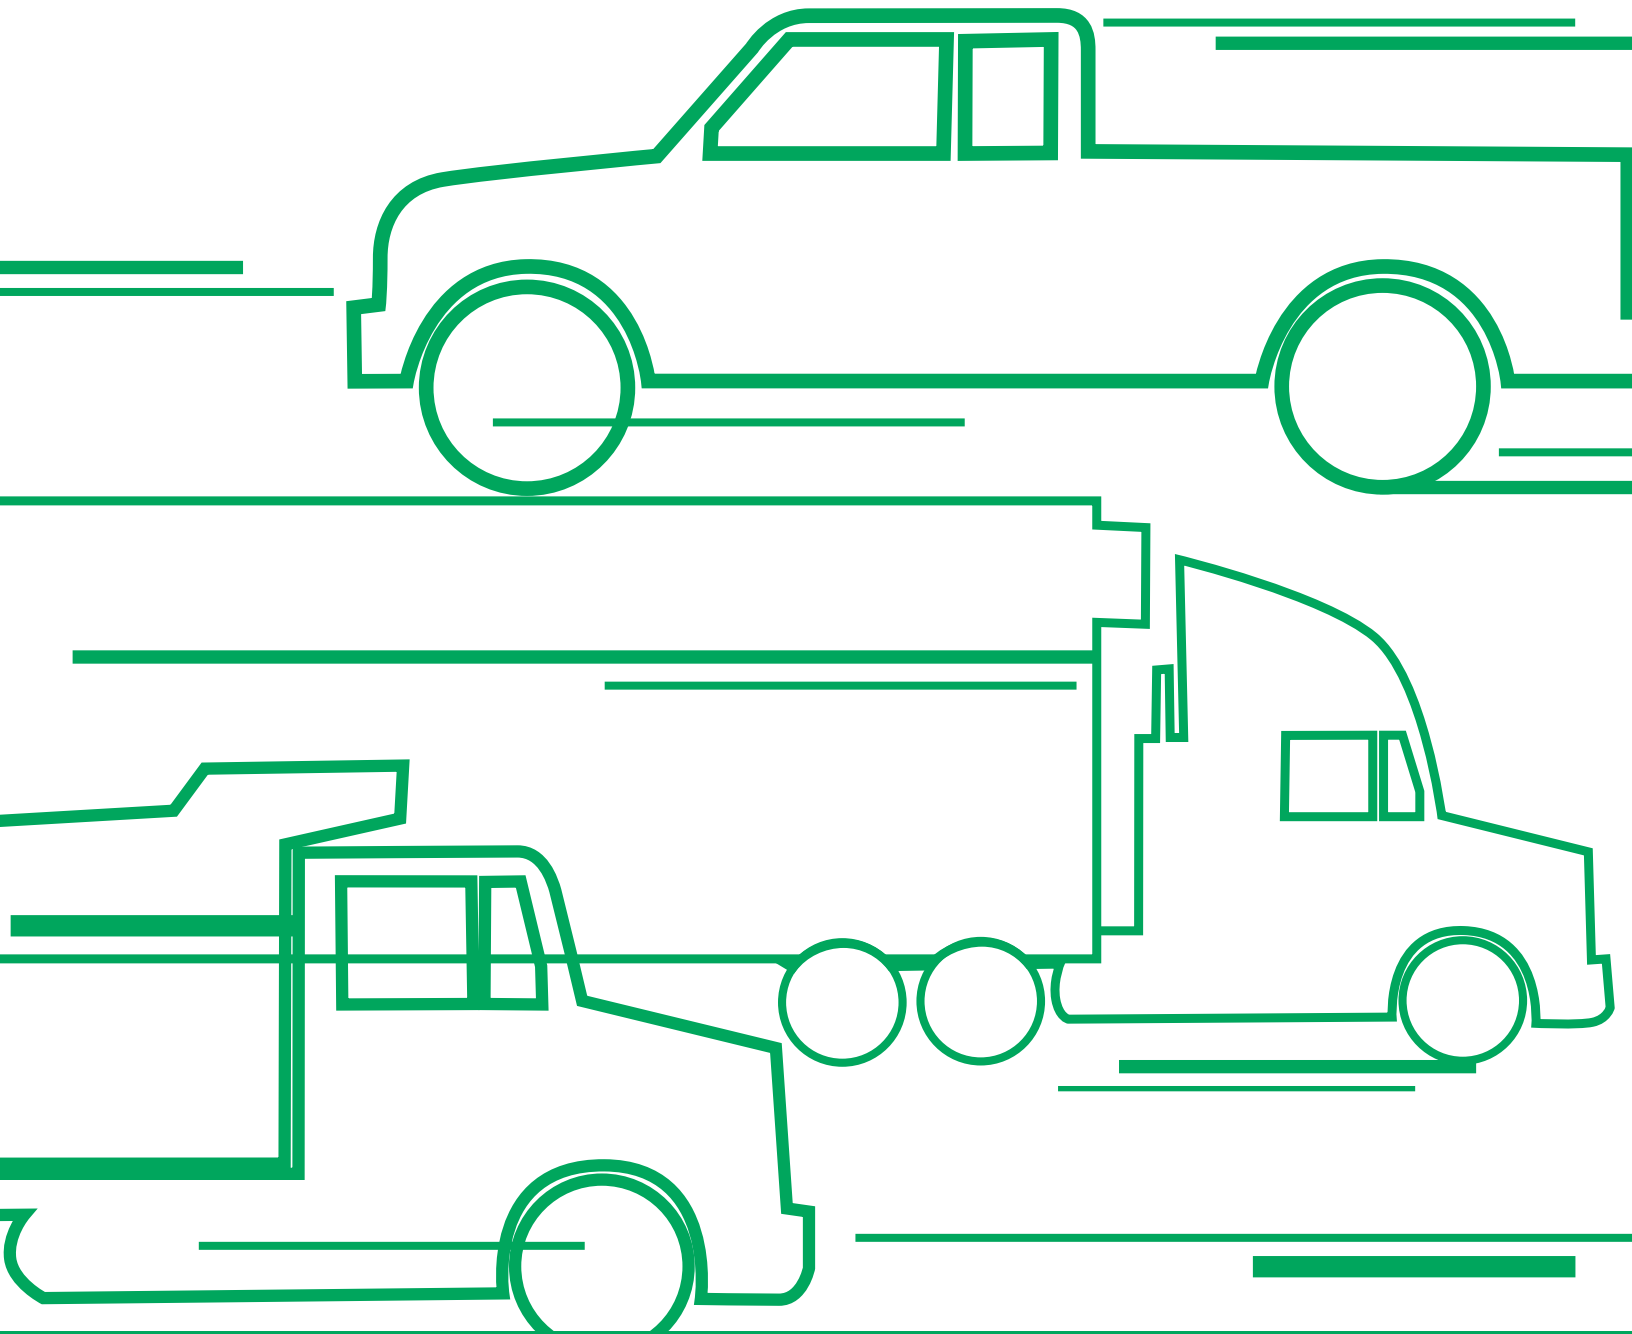

KELLY  **TIRES**[™]

A Good Deal
On A Great Tire[™]

www.goodyeartrucktires.com

A Good Deal On A Great Tire™ highlights the value of Kelly® commercial truck tires. This is evident in the miles of original tread life and tough casings that can usually be retreaded multiple times for additional miles of service. Kelly commercial tires are also backed by a nationwide limited warranty and are available for all major commercial applications. You can find these popular commercial tires at many Goodyear and Kelly Dealers across the country.

What's New with Kelly Armorsteel Gen-2















- All Kelly Armorsteel Gen-2 products are Goodyear developed, engineered and tested
- New tread designs across all lines
- Added sizes for a more complete commercial portfolio
- Improved rolling resistance on select lines
- Adding M+S traction rating on select lines across all categories
- Increased load carrying capacity on select steer, all-position and drive lines
- Increased speed ratings on the 19.5" Regional/Urban lines
- Enhanced Kelly Armorsteel Gen-2 Limited Casing Warranty (see warranty for complete details)

Size/Type Chart

	Long Haul			
Product Line	Armorsteel® LHS®2 Page 4	Armorsteel® LHD®2 Page 4	Armorsteel® LHT®2 Page 5	
11R22.5	H - 18	G - 28	G - 12	
11R24.5	H - 18	G - 28	G - 12	
285/75R24.5	H - 18	G - 28	G - 12	
295/75R22.5	H - 18	G - 28	G - 12	
	Regional/Urban			
Product Line	Armorsteel® RSA®2 Page 6	Armorsteel® RSD®2 Page 6	Armorsteel® RSA®2 ULT Page 7	Armorsteel® RSD®2 ULT Page 7
11R22.5	H - 20	H - 26		
11R24.5	H - 20	H - 26		
225/70R19.5			G - 16	G - 19
245/70R19.5			H - 16	H - 19
255/70R22.5	H - 26			
295/75R22.5	G - 20	G - 26		
	Mixed Service			
Product Line	Armorsteel® MSA2 Page 8		Armorsteel® MSD®2 Page 8	
11R22.5	H - 20		H - 30	
11R24.5	H - 20		H - 30	

NOTE: The letters in the chart represent load ranges. The numbers represent tread depth based on 32nds of an inch.

GOODYEAR COMMERCIAL PRODUCT PORTFOLIO – ALL BRANDS

	LONG HAUL 	REGIONAL 	URBAN 	MIXED SERVICE 
PREMIUM				
				
MID-TIER				
				
ECONOMY				
				

LONG HAUL TIRES



Armorsteel® LHS®2

Long Haul Steer Tire for Miles to Removal and Fuel Efficiency on Highway

- Balanced wear and fuel compounds help achieve long tread life and SmartWay fuel economy
- Decoupling groove and stone protector ledges help provide long, even wear while resisting stone drilling
- Steel belt casing helps provide retreadability or resale value

Competitive Replacements

Uniroyal LS2

Falken RI130 EcoRun

Double Coin FR610 & FR605

Tire Size	Load Range	Single Load		Single Inflation		Dual Load		Dual Inflation		Weight		Rim Width	Overall Width		Overall Diameter		Static Radius		RPM	RPK	Tread Depth	Min. Dual Spacing		Speed Rating
		lbs	kg	psi	kpa	lbs	kg	psi	kpa	lbs	kg	in	in	mm	in	mm	in	mm			32nds	in	mm	
TUBELESS TIRES ON 15" DROP CENTER RIMS																								
11R22.5	H	6,610	3,000	120	830	6,005	2,725	120	830	120.8	54.8	8.25	11.2	284	41.3	1,049	19.4	493	503	313	18	12.5	318	75
11R24.5	H	7,160	3,250	120	830	6,610	3,000	120	830	129.6	58.8	8.25	11.2	284	43.4	1,102	20.4	518	479	298	18	12.5	318	75
285/75R24.5	H	6,780	3,075	120	830	6,175	2,800	120	830	123.9	56.2	8.25	10.9	277	41.5	1,054	19.5	495	501	311	18	12.5	318	75
295/75R22.5	H	7,160	3,250	123	850	6,610	3,000	123	850	114.6	52.0	8.25	11.4	290	40.4	1,026	18.7	475	514	328	18	12.9	328	75



Armorsteel® LHD®2

Long Haul Drive Tire for Miles to Removal and Fuel Efficiency on Highway

- Balanced wear and fuel compounds help achieve long tread life and SmartWay fuel economy
- Deep 28/32nd tread design and center groove sipes help deliver long wear with M+S Traction
- Steel belt casing helps provide retreadability or resale value

Competitive Replacements

Uniroyal LD2

Falken BI830 EcoRun

Double Coin FD405 & RLB400

Tire Size	Load Range	Single Load		Single Inflation		Dual Load		Dual Inflation		Weight		Rim Width	Overall Width		Overall Diameter		Static Radius		RPM	RPK	Tread Depth	Min. Dual Spacing		Speed Rating
		lbs	kg	psi	kpa	lbs	kg	psi	kpa	lbs	kg	in	in	mm	in	mm	in	mm			32nds	in	mm	
		TUBELESS TIRES ON 15" DROP CENTER RIMS																						
11R22.5	G	6,175	2,800	105	720	5,840	2,650	105	720	121.1	54.9	8.25	11.1	282	42.2	1,072	19.6	498	495	308	28	12.5	318	75
11R24.5	G	6,610	3,000	105	720	6,005	2,725	105	720	129.5	58.7	8.25	11.2	284	44.2	1,123	20.7	526	472	293	28	12.5	318	75
285/75R24.5	G	6,175	2,800	110	760	5,675	2,575	110	760	124.7	56.6	8.25	10.8	274	42.2	1,072	19.9	505	495	308	28	12.5	318	75
295/75R22.5	G	6,175	2,800	110	760	5,675	2,575	110	760	119.9	54.4	8.25	11.0	279	41.0	1,041	19.3	490	509	316	28	12.9	328	75

LONG HAUL TIRES

SmartWay
Verified



Armorsteel® LHT®2

Long Haul Trailer Tire for Miles to Removal and Fuel Efficiency on Highway

- Balanced wear and fuel compounds help achieve long tread life and SmartWay fuel economy
- Micro sipes and wide outside shoulder ribs help provide long miles to removal and even wear
- Steel belt casing helps provide retreadability or resale value

Competitive Replacements

Uniroyal LT2

Falken RI119

Double Coin FT105 & FT115

Tire Size	Load Range	Single Load		Single Inflation		Dual Load		Dual Inflation		Weight		Rim Width	Overall Width		Overall Diameter		Static Radius		RPM	RPK	Tread Depth	Min. Dual Spacing		Speed Rating
		lbs	kg	psi	kpa	lbs	kg	psi	kpa	lbs	kg	in	in	mm	in	mm	in	mm			32nds	in	mm	
		TUBELESS TIRES ON 15" DROP CENTER RIMS																						
11R22.5	G	6,175	2,800	105	720	5,840	2,650	105	720	110.2	50.0	8.25	11.2	284	41	1,041	19.2	488	503	313	12	12.5	318	75
11R24.5	G	6,610	3,000	105	720	6,005	2,725	105	720	117.9	53.5	8.25	11.3	287	43	1,092	20.1	511	479	298	12	12.5	318	75
285/75R24.5	G	6,175	2,800	110	760	5,675	2,575	110	760	110.7	50.2	8.25	10.9	277	41.1	1,044	19.3	490	502	312	12	12.5	318	75
295/75R22.5	G	6,175	2,800	110	760	5,675	2,575	110	760	102.5	46.5	8.25	11.1	282	39.7	1,008	18.6	472	519	323	12	12.9	328	75

REGIONAL/URBAN TIRES



● Recommended ● Optional

Armorsteel® RSA®2

All-Position Tire for Long Miles to Removal and Fuel Economy in Regional Applications

- Balanced fuel and high scrub compound help achieve long mileage and SmartWay fuel economy
- Solid shoulder with micro blades helps deliver long, even wear in high-scrub conditions
- Steel belt casing helps provide retreadability through multiple retread cycles

Competitive Replacements

Uniroyal RS2

Falken RI150 & RI151

Double Coin RR680 & RR150

Tire Size	Load Range	Single Load		Single Inflation		Dual Load		Dual Inflation		Weight		Rim Width	Overall Width		Overall Diameter		Static Radius		RPM	RPK	Tread Depth	Min. Dual Spacing		Speed Rating
		lbs	kg	psi	kpa	lbs	kg	psi	kpa	lbs	kg	in	in	mm	in	mm	in	mm			32nds	in	mm	
		TUBELESS TIRES ON 15" DROP CENTER RIMS																						
11R22.5	H	6,610	3,000	120	830	6,005	2,725	120	830	113.7	51.6	8.25	11.2	284	41.6	1,057	19.5	495	499	310	20	12.5	318	75
11R24.5	H	7,160	3,250	120	830	6,610	3,000	120	830	121.2	55.0	8.25	11.3	287	43.6	1,107	20.5	521	476	296	20	12.5	318	75
255/70R22.5	H	5,510	2,500	120	830	5,070	2,300	120	830	87.3	39.6										16			75
295/75R22.5	G	6,175	2,800	110	760	5,675	2,575	110	760	110.3	50.0	8.25	11.2	284	40.3	1,024	18.9	480	515	320	20	12.9	328	75

M + S



Armorsteel® RSD®2

Open Shoulder Drive Tire for Long Miles to Removal and Traction in Regional Applications

- Long wear compounds with stiffening tie bars help deliver mileage and even wear
- Deep 26/32nd open shoulder design with stone protectors helps provide long miles and M+S traction
- Steel belt casing helps provide retreadability through multiple retread cycles

Competitive Replacements

Uniroyal RD2

Falken BI850

Double Coin RLB450

Tire Size	Load Range	Single Load		Single Inflation		Dual Load		Dual Inflation		Weight		Rim Width	Overall Width		Overall Diameter		Static Radius		RPM	RPK	Tread Depth	Min. Dual Spacing		Speed Rating
		lbs	kg	psi	kpa	lbs	kg	psi	kpa	lbs	kg	in	in	mm	in	mm	in	mm			32nds	in	mm	
		TUBELESS TIRES ON 15" DROP CENTER RIMS																						
11R22.5	H	6,610	3,000	120	830	6,005	2,725	120	830	123.2	55.9	8.25	11.3	287	42	1,067	19.7	500	497	309	26	12.5	318	75
11R24.5	H	7,160	3,250	120	830	6,610	3,000	120	830	132.3	60.0	8.25	11.3	287	44.1	1,120	20.6	523	473	294	26	12.5	318	75
295/75R22.5	G	6,175	2,800	110	760	5,675	2,575	110	760	118.6	53.8	8.25	11.3	287	40.8	1,063	19.1	485	512	318	26	12.9	328	75

REGIONAL/URBAN TIRES



● Recommended ● Optional

Armorsteel® RSA®2 ULT

19.5" Regional and Urban All-Position Tire for Long Miles to Removal

- High-scrub tread compounds help deliver mileage and even wear
- Solid shoulder with micro blades helps deliver long, even wear in high-scrub conditions
- Steel belt casing helps provide retreadability through multiple retread cycles

Competitive Replacements

Uniroyal RS2

Falken RI151 Plus & RI191

Double Coin RT600

Tire Size	Load Range	Single Load		Single Inflation		Dual Load		Dual Inflation		Weight		Rim Width	Overall Width		Overall Diameter		Static Radius		RPM	RPK	Tread Depth	Min. Dual Spacing		Speed Rating
		lbs	kg	psi	kpa	lbs	kg	psi	kpa	lbs	kg	in	in	mm	in	mm	in	mm			32nds	in	mm	
		TUBELESS TIRES ON 15" DROP CENTER RIMS																						
225/70R19.5	G	3,970	1,800	110	760	3,750	1,700	110	760												16			87
245/70R19.5	H	4,940	2,240	120	825	4,675	2,120	120	825												16			81

M + S



Armorsteel® RSD®2 ULT

19.5" Regional and Urban Open Shoulder Drive Tire for Long Miles to Removal and Traction

- Long wear compounds with stiffening tie bars help deliver mileage and even wear
- Deep 19/32nd open shoulder tread design helps provide long miles and M+S traction
- Steel belt casing helps provide retreadability through multiple retread cycles

Competitive Replacements

Uniroyal RD2


Falken BI850

Double Coin RLB490

Tire Size	Load Range	Single Load		Single Inflation		Dual Load		Dual Inflation		Weight		Rim Width	Overall Width		Overall Diameter		Static Radius		RPM	RPK	Tread Depth	Min. Dual Spacing		Speed Rating
		lbs	kg	psi	kpa	lbs	kg	psi	kpa	lbs	kg	in	in	mm	in	mm	in	mm			32nds	in	mm	
		TUBELESS TIRES ON 15" DROP CENTER RIMS																						
225/70R19.5	G	3,910	1,800	110	760	3,750	1,700	110	760												19			87
245/70R19.5	H	4,940	2,240	120	825	4,675	2,120	120	825												19			81

MIXED SERVICE TIRES

M + S



● Recommended ● Optional

Armorsteel® MSA2

Mixed Service All-Position Tire for Long Miles to Removal in On/Off-Road Applications

- High-scrub mixed service compounds balance miles to removal and cut/chip resistance
- Four-rib on/off-road design helps to achieve M+S traction and long treadwear
- Steel belt casing helps resist stone drilling and improve retreadability

Competitive Replacements


Uniroyal HS2

Falken GI388

Double Coin RR706 & RR99

Tire Size	Load Range	Single Load		Single Inflation		Dual Load		Dual Inflation		Weight		Rim Width	Overall Width		Overall Diameter		Static Radius		RPM	RPK	Tread Depth	Min. Dual Spacing		Speed Rating
		lbs	kg	psi	kpa	lbs	kg	psi	kpa	lbs	kg	in	in	mm	in	mm	in	mm			32nds	in	mm	
		TUBELESS TIRES ON 15" DROP CENTER RIMS																						
11R22.5	H	6,610	3,000	120	830	6,005	2,725	120	830	113.1	51.3										20			68
11R24.5	H	7,160	3,250	120	830	6,610	3,000	120	830	121.3	55.0										20			68

M + S



Armorsteel® MSD®2

Mixed Service Drive Tire for Long Miles to Removal in On/Off-Road Applications

- Tough and dependable mixed service compounds balance miles to removal and cut/chip resistance
- Deep 30/32nd open shoulder tread design helps to achieve M+S traction and long treadwear
- Steel belt casing helps resist stone drilling and improve retreadability

Competitive Replacements

Uniroyal HD2

Falken CI637

Double Coin RLB600 & RLB800

Tire Size	Load Range	Single Load		Single Inflation		Dual Load		Dual Inflation		Weight		Rim Width	Overall Width		Overall Diameter		Static Radius		RPM	RPK	Tread Depth	Min. Dual Spacing		Speed Rating
		lbs	kg	psi	kpa	lbs	kg	psi	kpa	lbs	kg	in	in	mm	in	mm	in	mm			32nds	in	mm	
		TUBELESS TIRES ON 15" DROP CENTER RIMS																						
11R22.5	H	6,610	3,000	120	830	6,005	2,725	120	830	126.3	57.3										30			68
11R24.5	H	7,160	3,250	120	830	6,610	3,000	120	830	131.4	59.6										30			68

LIGHT TRUCK TIRES AND COMMERCIAL TRUCK TIRES

The inflations shown in the load tables are minimum cold pressures for the various loads listed.

LOAD TABLE

FOR TRUCKS, BUSES AND TRAILERS USED IN NORMAL HIGHWAY SERVICE

TIRE LOAD LIMITS (LBS.) AT VARIOUS COLD INFLATION PRESSURES (PSI)

TIRE SIZE	DUAL (D) SINGLE (S)	MAX LOAD AND INFLATION ON SIDEWALL	PSI 70	75	80	85	90	95	100	105	110	115 112†	120	125	130
225/70R19.5															
LR-G	D	3,750 lbs at 110 psi	2720	2860	3000(E)	3115	3245	3415(F)	3490	3615	3750(G)				
	S	3,970 lbs at 110 psi	2895	3040	3195(E)	3315	3450	3640(F)	3715	3845	3970(G)				
245/70R19.5															
LR-H	D	4,675 lbs at 120 psi				3550	3710	3880	4040	4200	4360	4520	4675(H)		
	S	4,940 lbs at 120 psi				3750	3920	4100	4270	4440	4610	4770	4940(H)		
11R22.5															
LR-G	D	5,840 lbs at 105 psi	4380	4580	4760	4950	5205(F)	5415	5625	5840(G)					
	S	6,175 lbs at 105 psi	4530	4770	4990	5220	5510(F)	5730	5950	6175(G)					
LR-H	D	6,005 lbs at 120 psi	4380	4580	4760	4950	5205(F)	5415	5625	5840(G)	5895	5950	6005(H)		
	S	6,610 lbs at 120 psi	4530	4770	4990	5220	5510(F)	5730	5950	6175(G)	6320	6465	6610(H)		
11R24.5															
LR-G	D	6,005 lbs at 105 psi	4660	4870	5070	5260	5510(F)	5675	5840	6005(G)					
	S	6,610 lbs at 105 psi	4820	5070	5310	5550	5840(F)	6095	6350	6610(G)					
LR-H	D	6,610 lbs at 120 psi	4660	4870	5070	5260	5510(F)	5675	5840	6005(G)	6205	6405	6610(H)		
	S	7,160 lbs at 120 psi	4820	5070	5310	5550	5840(F)	6095	6350	6610(G)	6790	6970	7160(H)		
255/70R22.5															
LR-H	D	5,070 lbs at 120 psi			3970	4110	4275	4410	4455	4610	4675(G)	4915	5070(H)		
	S	5,510 lbs at 120 psi			4190	4370	4550	4675	4895	5065	5205(G)	5400	5510(H)		
295/75R22.5															
LR-G	D	5,675 lbs at 110 psi	4095	4300	4540	4690	4885	5070	5260	5440	5675(G)				
	S	6,175 lbs at 110 psi	4500	4725	4940	5155	5370	5510	5780	5980	6175(G)				
LR-H	D	6,610 lbs at 123 psi				4920	5150	5380	5600	5820	6040	6260	6480	6610(H)†	
	S	7,160 lbs at 123 psi				5330	5580	5820	6070	6310	6550	6780	7020	7160(H)†	
285/75R24.5															
LR-G	D	5,675 lbs at 110 psi	4135	4340	4540	4740	4930	5205	5310	5495	5675(G)				
	S	6,175 lbs at 110 psi	4545	4770	4990	5210	5420	5675	5835	6040	6175(G)				
LR-H	D	6,175 lbs at 120 psi	4135	4340	4540	4740	4930	5205	5310	5495	5675(G)	5860	6175(H)		
	S	6,780 lbs at 120 psi	4545	4770	4990	5210	5420	5675	5835	6040	6175(G)	6440	6780(H)		

†Max loads are at 123 psi.

Note: Letters in parentheses denote load range for which BOLDFACE loads are maximum.

CAUTION – Always use approved tire and rim combinations for diameters and widths.

The Goodyear Tire & Rubber Company periodically updates its product information. To select the proper load and inflation, locate the tire size and then select the row that matches the maximum load(s) and inflation(s) stamped on the tire. Contact a Goodyear Dealer for tables not listed.

Kelly® Armorsteel Limited Warranty

United States and Canada

WHO IS ELIGIBLE FOR WARRANTY COVERAGE?

You are eligible for the benefits of this limited warranty if you meet all of the following criteria:

- You are the owner or authorized agent of the owner of new Kelly® medium radial truck tires.
- Your tires bear Department of Transportation (DOT) prescribed tire identification numbers and are not branded “NA” (Not Adjustable).
- Your Kelly medium radial truck tires have been used only on the vehicle on which they were originally installed according to the vehicle manufacturer's or Kelly's recommendations.
- Your tires were purchased on or after September 1, 2022.

WHAT IS COVERED AND FOR HOW LONG?

1. FREE TIRE REPLACEMENT – Kelly medium radial truck tires covered by this warranty that become unserviceable due to a covered warranty condition during the first 2/32" (inch) treadwear or 12 months from date of purchase, whichever comes first, will be replaced with a comparable new Kelly medium radial truck tire without charge. You pay only for the mounting and balancing. (Without proof of purchase, date of manufacture will be used to determine eligibility.)

2. PRORATED TIRE REPLACEMENT – Tires worn beyond the first 2/32" (inch) treadwear that become unserviceable due to a covered warranty condition will be replaced on a prorated basis. You are responsible for mounting, balancing and any additional services you order at the time of adjustment, as well as any taxes and government-mandated charges.

HOW WILL THE PRORATED CHARGES BE CALCULATED?

The replacement price will be calculated by multiplying the current Kelly advertised selling price, at the adjustment location, by the percentage of usable original tread that has been worn off at the time of adjustment. You pay for mounting, balancing, an amount equal to the full current Federal Excise Tax (U.S. only) and any other applicable taxes for the comparable new Kelly replacement tire as well as any government-mandated charges.

EXAMPLE:

If your disabled tire had an original 16/32" (inch) of usable tread depth and is worn to 8/32" (inch) of usable tread remaining, you have used 50% and therefore must pay 50% of the advertised selling price of a comparable tire, plus an amount equal to the full current Federal Excise Tax (U.S. only) applicable to the comparable new replacement tire at the time of adjustment. If the price of the comparable tire is \$400.00, the cost to you would be \$200.00, plus Federal Excise Tax (U.S. only), mounting, balancing, any other applicable taxes and government-mandated charges.

Amount Of Tread Used Original Tread	×	Value Of Comparable Tire	=	Prorated Price Of New Tire
--	---	-----------------------------	---	-------------------------------

(Plus FET [U.S. only], other applicable taxes, government-mandated charges and mounting and balancing.)

WHAT IS A COMPARABLE TIRE?

A “comparable” new Kelly medium radial truck tire may be either the same line of tire or, in the event that the same tire is not available, a tire of the same basic construction and quality with a different sidewall or tread configuration. If a higher-priced tire is accepted as replacement, the difference in price will be at an additional charge to you.

Any replacement tire provided pursuant to this warranty will be covered by the Kelly warranty in effect at the time of replacement.

WHAT IS NOT COVERED UNDER THIS LIMITED WARRANTY?

- Wear conditions or tire damage due to road hazards (including punctures, cuts, snags, impact breaks, etc.), wreck, collision, fire, fast wear, irregular wear, heel and toe wear or other wear conditions.
- Improper inflation, overloading, high-speed spinup, misapplication, misuse, negligence, racing, chain damage or improper mounting or demounting.
- Mechanical condition of the vehicle.
- Chip/chunk conditions on tires intended for highway service.
- Ride disturbance after the first 2/32" (inch) treadwear or due to damaged wheels or any vehicle condition.
- Any tire intentionally altered after leaving a factory producing Kelly tires to change its appearance (example: white inlay on a black tire).
- Tires with weather cracking which were purchased more than four (4) years prior to presentation for adjustment. If you have no proof of purchase date, tires manufactured four (4) or more years prior to presentation are not covered.
- Material added to a tire after leaving a factory producing Kelly tires (examples: tire fillers, sealants or balancing substances). If the added material is the cause of the tire being removed from service, the tire will not be adjusted.
- Tires removed from service due to improper repairs.
- Loss of time, inconvenience, loss of use of vehicle, incidental or consequential damage.

Note: Some states or provinces do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you.

This limited warranty is applicable only in the U.S. and Canada.

WHAT IS THE RADIAL MEDIUM TRUCK TIRE CASING PROVISION?

All Kelly® Armorsteel LHS2, LHD2, LHT2, RSA2, RSD2 medium radial truck tires will be warranted for covered conditions through the first retread for a period of six (6) years from the date of the casing DOT serial number or proof of purchase, if available. If retreaded by a Goodyear Authorized Retreader, casings will be warranted for covered conditions for two (2) retreads for a period of six (6) years from the date of the casing DOT serial number or proof of purchase date, if available.

All Kelly® Armorsteel RSA2 ULT, RSD2 ULT, MSA2 and MSD2 medium radial truck tires will be warranted for covered conditions through the first retread for a period of four (4) years from the date of the casing DOT serial number or proof of purchase, if available. If retreaded by a Goodyear Authorized Retreader, casings will be warranted for covered conditions for two (2) retreads for a period of four (4) years from the date of the casing DOT serial number or proof of purchase date, if available.

All other Kelly® Armorsteel medium radial truck tires will be warranted for covered conditions through the first retread for a period of four (4) years from the date of the casing DOT serial number or proof of purchase if available. If retreaded by a Goodyear Authorized Retreader, casings will be warranted for covered conditions for an unlimited number of retreads for a period of four (4) years from the date of the casing DOT serial number or proof of purchase, if available. Casing values are based on the predetermined casing value at the time of adjustment. See your servicing Dealer for these values.

HOW DO YOU KNOW WHEN YOUR TIRES WERE MANUFACTURED?

Tires with a DOT number ending with 1822 or greater were manufactured after 05/01/2022 (1822 refers to the 18th week of 2022). These tires are covered under the provisions of this warranty.

WHEN DOES THE WARRANTY END?

All Kelly® Armorsteel LHS2, LHD2, LHT2, RSA2, RSD2 medium radial truck tires have delivered the full original tread life and the new tire coverage of this warranty ends when the treadwear indicators become visible or six (6) years from new tire purchase date (whichever occurs first). Without proof of purchase, date of manufacture will be used to determine eligibility. Casings may continue to be warranted beyond the new tire coverage.

All other Kelly® Armorsteel medium radial truck tires have delivered the full original tread life and the new tire coverage of this warranty ends when the treadwear indicators become visible or four (4) years from the date of original tire manufacture or new tire purchase date (whichever occurs first). Without proof of purchase, date of manufacture will be used to determine eligibility. Casings may continue to be warranted beyond the new tire coverage.

Please refer to the “WHAT IS THE RADIAL MEDIUM TRUCK TIRE CASING PROVISION?” section for warranty details on casings.

HOW DO YOU OBTAIN AN ADJUSTMENT?

- A. You must present the tire to be adjusted to an authorized Kelly Commercial Tire Retailer. Please consult your telephone directory or kellytires.com/commercial for locations. Tires replaced on an adjustment basis become the property of The Goodyear Tire & Rubber Company or Goodyear Canada Inc.
- B. You must pay for taxes or any additional service you order at the time of adjustment.
- C. No claim will be recognized unless submitted on a Kelly claim form (supplied by a Kelly Commercial Tire Retailer) that is completely filled out and signed by you, the owner of the tire presented for adjustment, or your authorized agent.

WHAT ARE YOUR LEGAL RIGHTS?

This warranty gives you specific legal rights, and you may also have other rights that vary from state to state and province to province.

Note: No Representative or Dealer has authority to make any representation, promise or agreement on behalf of Kelly except as stated herein.

Any tire, no matter how well constructed, may fail in service or otherwise become unserviceable due to conditions beyond the control of the manufacturer. Under no circumstances is this warranty a representation that a tire failure cannot occur.

DISCLAIMER: THIS WARRANTY IS IN LIEU OF, AND GOODYEAR HEREBY DISCLAIMS, ANY AND ALL OTHER WARRANTIES AND REPRESENTATIONS, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, AND NO OTHER WARRANTY OR REPRESENTATION OF ANY KIND IS MADE BY GOODYEAR OR SHALL BE IMPLIED BY LAW.

LIMITATION OF DAMAGES: IN NO EVENT AND UNDER NO CIRCUMSTANCE SHALL GOODYEAR BE LIABLE TO THE BUYER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, CONSEQUENTIAL, LOST PROFIT, LOSS OF BUSINESS, LOSS OF GOODWILL OR REPUTATION, PUNITIVE OR OTHER DAMAGE, COST (INCLUDING FOR REPLACEMENT TRANSPORTATION), EXPENSE OR LOSS OF ANY KIND. SOME STATES AND PROVINCES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU.



SAFETY WARNINGS

Property damage, serious injury or death may result from:

- **TIRE FAILURE DUE TO UNDERINFLATION/OVERLOADING/MISAPPLICATION.** Follow the vehicle owner's manual or tire placard in the vehicle.
- **TIRE FAILURE DUE TO IMPACT DAMAGE/IMPROPER MAINTENANCE.** Tires should be inspected regularly by a qualified technician for signs of damage, such as punctures or impacts.
- **TIRE FAILURE DUE TO IMPROPER REPAIRS.** See Rubber Manufacturers Association (RMA) established repair procedures at www.rma.org and/or go to www.goodyear.com/truck for information on proper repair procedures.
- **EXPLOSION OF TIRE/RIM ASSEMBLY DUE TO IMPROPER MOUNTING.** Only specially trained persons should mount tires. When mounting tires, use safety cage and clip-on extension air hose to inflate.
- **FAILURE TO MOUNT RADIAL TIRES ON APPROVED RIMS.**
- **FAILURE TO DEFLATE SINGLE OR DUAL ASSEMBLIES COMPLETELY BEFORE DEMOUNTING.**
- **TIRE SPINNING.** On slippery surfaces such as snow, mud, ice, etc., do not spin tires in excess of 35 mph (56 kph), as indicated on the speedometer.
- **EXCESSIVE WHEEL SPINNING.** This can also result in tire disintegration or axle failure.

FOR SERVICE ASSISTANCE OR INFORMATION:

1. First contact the nearest Authorized Kelly Commercial Tire Retailer.
2. If additional assistance is required:
 - In the U.S., write to –
Kelly Customer Assistance Center
Department 728
200 Innovation Way
Akron, OH 44316
 - In Canada, write to –
Kelly Customer Assistance Center
450 Kipling Avenue
Toronto, Ont. M8Z 5E1



For fast and reliable 24/7 roadside service, call 1-866-FleetHQ.

www.goodyeartrucktires.com