


Kelly® Commercial Truck Tires

With a heritage of value, performance and dependability, Kelly commercial tires have represented A Good Deal On A Great Tire! The same applies today – Kelly tires can deliver great tread life and performance. Kelly casings can be retreaded multiple times for additional miles of service and have a wide range of KRH® Regional/all-position and KDM® 1 Regional Drive sizes to help get you where you want to go. Kelly commercial tires are also backed by a nationwide limited warranty to give you peace of mind and confidence.

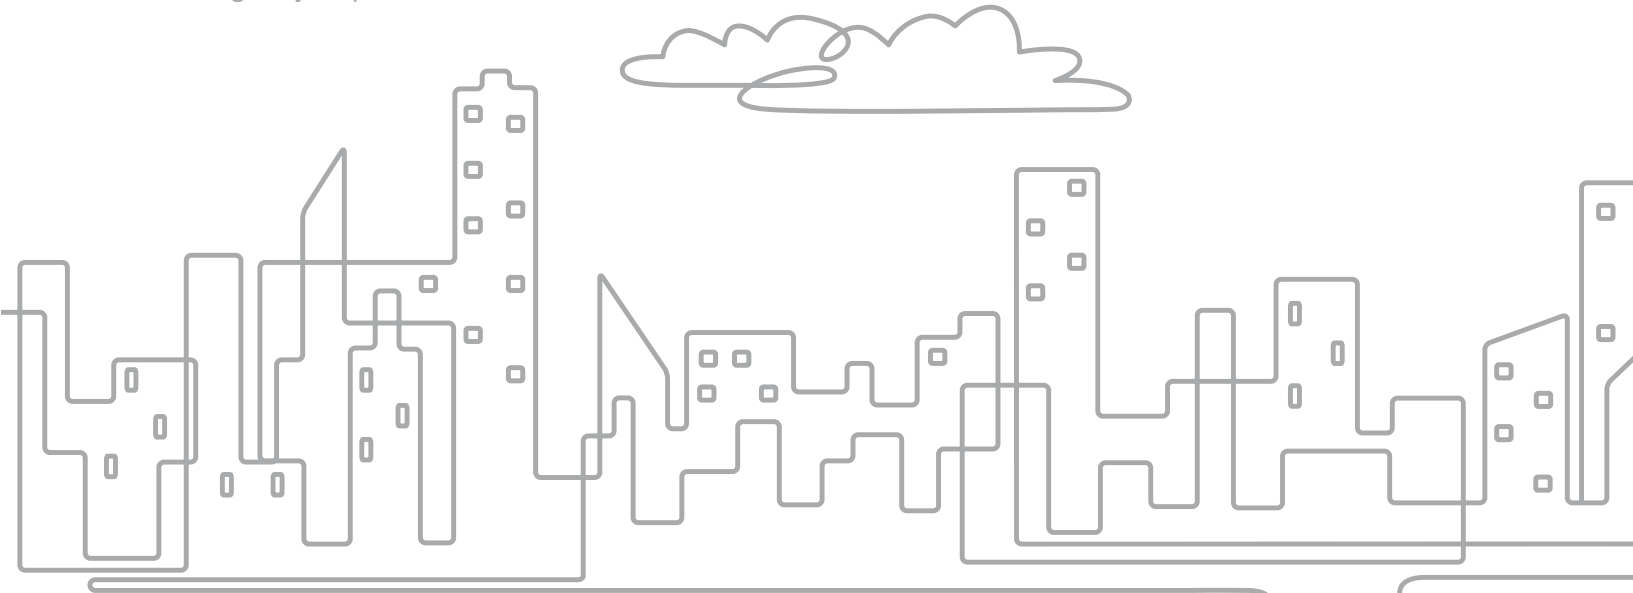


KRH
Regional/All-Position

KDM 1
Regional Drive





KRH[®] All-Position Rib Tire




- Deep 20/32" tread helps provide long original tread life.
- Tread pattern enhances traction on wet and dry roads.
- Belt package offers even wear with less scrub.
- Rib pattern helps promote uniform wear.

Tire Size	Load Range	Single Load		Single Inflation		Dual Load		Dual Inflation		Weight		Rim Width	Overall Width		Overall Diameter		Static Radius		RPM	RPK	Tread Depth	Min. Dual Spacing		Speed Rating
		lbs	kg	psi	kpa	lbs	kg	psi	kpa	lbs	kg	in	in	mm	in	mm	in	mm			32nds	in	mm	
TUBELESS TIRES ON 15" DROP CENTER RIMS																								
11R22.5	H	6,610	3,000	120	830	6,005	2,725	120	830	124	56	8.25	10.9	277	41.5	1,054	19.4	493	501	311	20	12.5	318	75
295/75R22.5	G	6,175	2,800	110	760	5,675	2,575	100	760	115	52	8.25	11.1	282	40.5	1,026	18.9	480	514	319	20	12.9	328	75
11R24.5	H	7,160	3,250	120	830	6,610	3,000	120	830	132	60	8.25	11.0	279	43.6	1,105	20.3	516	478	297	20	12.5	318	75



KDM[®] I Drive Tire



- Aggressive tread design and deep tread depth help provide even treadwear.
- Isolated-element tread pattern helps promote excellent traction.
- Unique blading pattern enhances the performance and appearance as the tire begins to wear.
- Tread radius helps distribute pressure evenly over the footprint for uniform treadwear and long tread life.
- All-steel casing and belts enhance toughness and help increase casing life.

Tire Size	Load Range	Single Load		Single Inflation		Dual Load		Dual Inflation		Weight		Rim Width	Overall Width		Overall Diameter		Static Radius		RPM	RPK	Tread Depth	Min. Dual Spacing		Speed Rating
		lbs	kg	psi	kpa	lbs	kg	psi	kpa	lbs	kg	in	in	mm	in	mm	in	mm			32nds	in	mm	
TUBELESS TIRES ON 15" DROP CENTER RIMS																								
11R22.5	G	6,610	2,800	120	720	6,005	2,650	120	720	125	57	8.25	11.1	279	42.0	1,069	19.6	498	496	308	26	12.5	318	75
11R22.5	H	6,610	3,000	120	830	6,005	2,725	120	830	131	59	8.25	11.0	279	42.1	1,069	19.6	498	496	308	26	12.5	318	75
295/75R22.5	G	6,175	2,800	110	760	5,675	2,575	100	690	123	56	8.25	10.9	277	41.0	1,041	19.0	483	509	316	26	12.9	328	75
11R24.5	H	7,160	3,250	120	830	6,610	3,000	120	830	139	63	8.25	11.1	279	44.2	1,120	20.5	521	473	294	26	12.5	318	75